




The Fang - Installation Instructions

For the Artillian GP20 Grapple

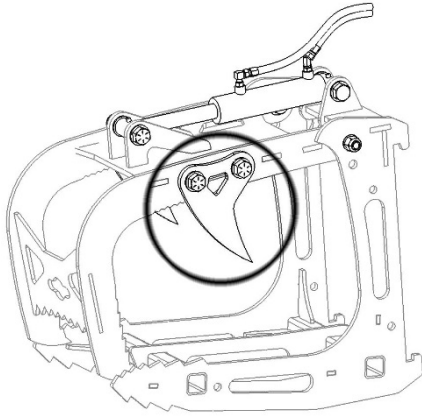

Parts Included

1. (2) Fang Plates
2. (4) $\frac{3}{4}$ " x 2" Bolts
3. (8) $\frac{3}{4}$ " Flat Washers
4. (4) $\frac{3}{4}$ " Lock Nuts

1. Place a washer onto a bolt. Pass bolt through Fang, then through the slot in the Upper Grapple Jaw.
2. Add a washer onto the bolt from the inside, then install a nut hand tight.
3. Repeat for all bolts.
4. Tighten all joints by hand using open end wrenches or adjustable wrenches. Center Fang in slot while tightening to allow both nuts to fit without touching Grapple.
5. Removal is the opposite of installation.

