




## Rock Bucket Sides—Installation Instructions

P/N: GRP-GP20-RBS  
For Artillian GP20 Grapple

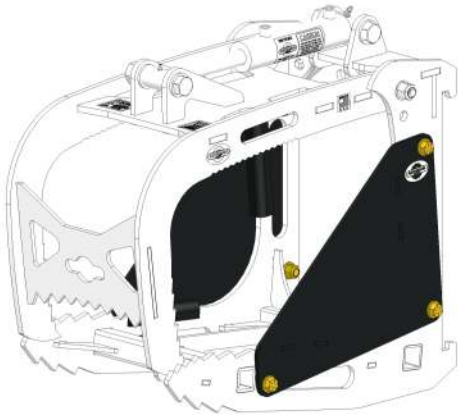


### Parts Included

- (2) Rock Bucket Sides (1 Left & 1 Right)
- (6) 1/2-13 x 1-1/2" LG Bolts
- (6) 1/2-13 Lock Nuts
- (12) 1/2" Flat Washers

An Artillian Debris Guard is also available to turn your Grapple into a fully functional Rock Bucket.

1. Place Bucket Side onto side of Grapple (or Rake) as shown. Use angled mounting bracket to assist in placement for installation of fasteners.

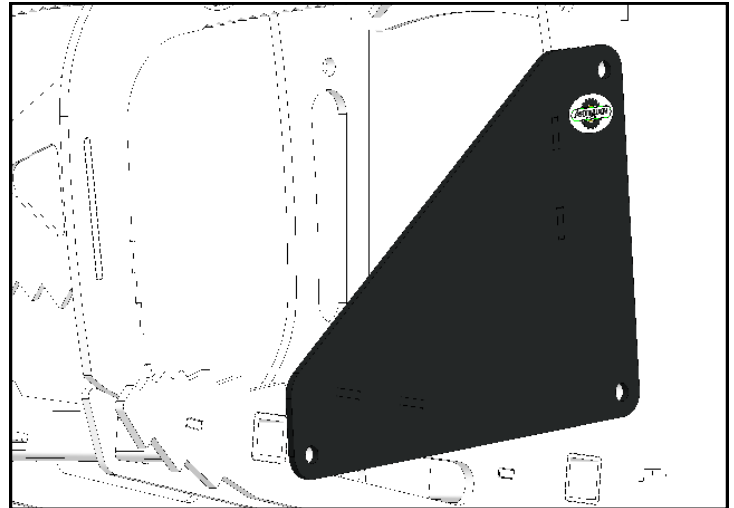

2. Place a washer onto a bolt. Pass bolt through Bucket Side, then through one of three mounting holes in the Lower Grapple Jaw (or Rake).
3. Add a washer onto the bolt from the inside, then install a nut hand tight. As shown.
4. Repeat for all bolts.
5. Tighten all joints in an alternating pattern using open-end wrenches or socket wrenches.
6. Repeat for opposite side.
7. Removal is the opposite of installation.

